

AA-14FB


ENTRANCE PANEL

Description

Multi-apartment entrance panels with 10" TFT screen with backlight and heated under plate, with face recognition and support of mobile access **BAS-IP UKEY**. The panel has a unique feature — face recognition.

This identifying technology is integrated into the BAS-IP panels and uses the camera of the outdoor panel and infrared sensors for its operation.



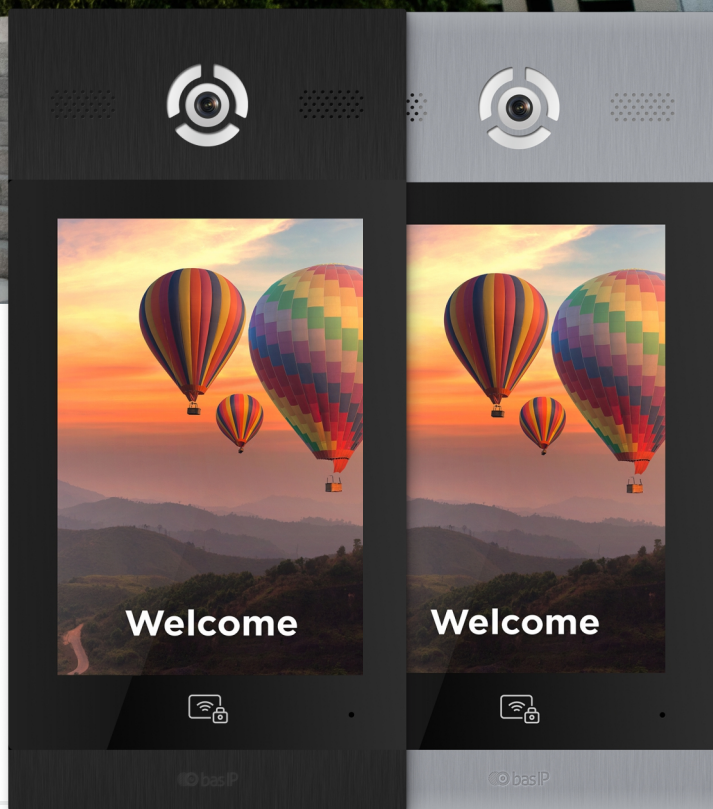













Once the tenants & common visitors are identified, the entrance panel can automatically unlock and voice an important message or useful information about the residential complex.



Specifications

| | |
|-----------------------------|--|
| Panel type | Multi-apartment |
| Display | 10" TFT, color with backlight and heated |
| Keyboard | Touch screen |
| Camera | 1/4" |
| Resolution | 2 Mpx |
| Camera angle | 110° (horizontal) |
| Output video | Full HD (1920 × 1080), H.264 Main Profile |
| Night backlight | 6 LEDs |
| Light sensitivity | 0,01 LuX |
| Protection class | IP65 |
| IK-Code | IK06 |
| Working temperature | -40 — +65 °C |
| Power consumption | 6,5 W, in standby — 3,6 W |
| Power supply | +12 V DC |
| Body | Aluminum |
| Colors | Silver / Black |
| Dimensions for installation | 172 × 373 × 58 mm |
| Size of the pane | 185 × 400 × 45 mm |
| Installation | Flush, surface with BR-AA14 bracket |

Main features

-  10" touch screen
-  Automatic face recognition
-  Camera resolution 2.0 MP
-  UKEY mobile access
-  Phone book
-  Concierge calling
-  Calling the lift to the floor
-  Flexible system setup
-  Protection class IP65
-  Working temperature -40 – +65 °C
-  Individual menu design
-  Remote add faces
-  Fault alert
-  Automatic configuration
-  Log all events
-  Open API

Functional capabilities

Interface

Multi-language graphical and WEB interface

Lock opening

By means of a monitor
Face Recognition Identification
By QR code
By guest link
By Pin
By access card
By license plates
The BAS-IP Intercom app
The BAS-IP Link app
The BAS-IP UKEY app
From API

Access control integration

WIEGAND-26+ output

Shortcut buttons

Concierge button

Number of call melodies

4 polyphonic melodies, ability to customize melodies for different actions

Authentication

Separate password for settings, WEB – interface and RTSP stream


Talking mode

Full duplex


Additionally

Software Link support
SIP P2P
Built-in relay
Proximity sensor
Open API

Color variations




BLACK




SILVER


Appearance and mechanical mounting

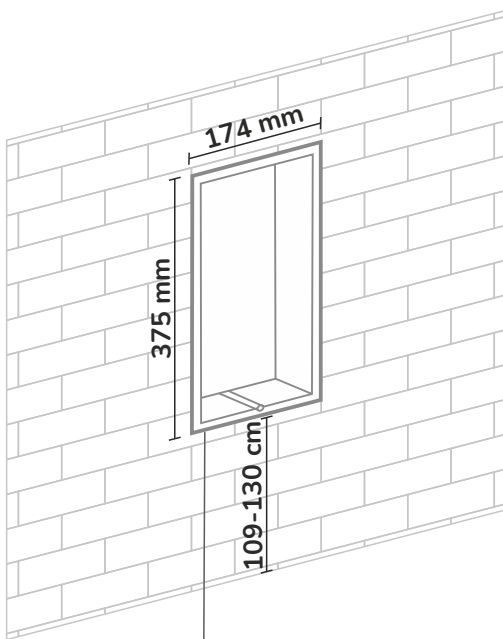

Niche

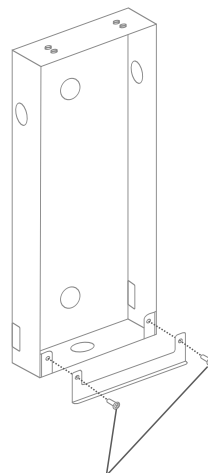

Screws

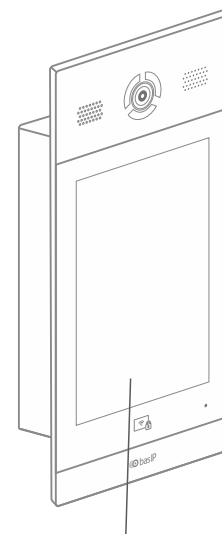

Outdoor Panel